

Rekta 80x100 Direct - satin - HO 150mA - ANO  
07.68004563-0001

**Fixture details**

|                 |                  |
|-----------------|------------------|
| Mounting        | Ceiling recessed |
| Light emission  | Direct           |
| Fitting cover   | satin diffusor   |
| Protection rate | IP 20            |
| Housing         | Aluminium        |
| Finish          | anodized finish  |
| Certificates    | CE, ISO 9001     |



**Electric details**

|                  |                        |
|------------------|------------------------|
| Protection class | I                      |
| Supply           | 230V                   |
| Control gear box | Current driver DALI/TD |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K        |
| Wattage             | 3,2W             |
| Gross luminous flux | 3840             |
| Luminaire power     | 21,1W            |
| Number              | 6                |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | >80              |

**Photometric details**


|              |                 |
|--------------|-----------------|
| UGR          | >19             |
| CIE Fluxcode | 54 83 97 100 69 |


**Dimensions**

|   |         |
|---|---------|
| A | 1684 mm |
|---|---------|

**Remarks**

Recessed luminaire (trimless) - Direct - HO 150mA - satin - ANO

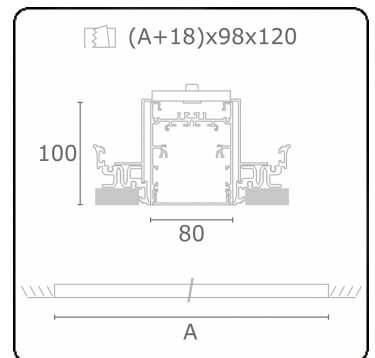

**ENERGY** 

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015