

Sferio Direct - MPO - MO - RAL 9003
05.36012163-9003

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9003 Signal white
Certificates	CE, ISO 9001



Electric details

Protection class	I
Supply	230V
Control gear box	Current driver 1-10V

Lamp details

Lamptype	LED 3000K
Wattage	195W
Luminaire power	195W
Luminaire luminous flux	18803
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	60 87 97 100 100

Dimensions

A	1200 mm
---	---------

Remarks

Ceiling luminaire - Direct - MPO - MO - RAL 9003

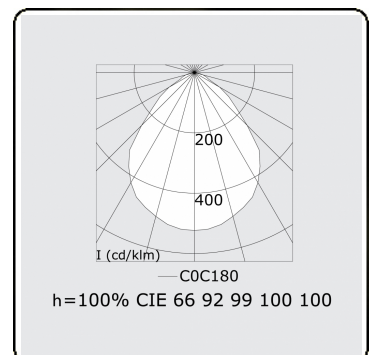

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
F
 Auf Anfrage.
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015