

Anilo Direct - MPO - HO - RAL 9003
05.49016253-9003

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9003 Signal white
Certificates	CE, ISO 9001



Electric details

Protection class	I
Supply	230V
Control gear box	Power supply touch-dim

Lamp details

Lamptype	LED 3000K
Wattage	172W
Luminaire power	172W
Luminaire luminous flux	14829
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	56 84 97 100 100

Dimensions

A	2500 mm
---	---------

Remarks

Ceiling luminaire - Direct - MPO - HO - RAL 9003

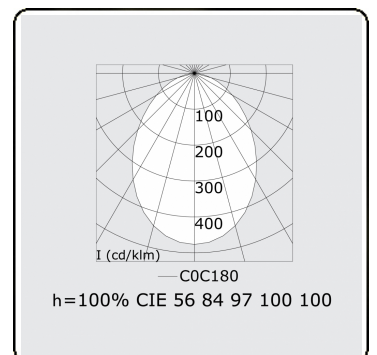

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
F
 Auf Anfrage.
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015