

Clip
35.17005-9906

Fixture details

Mounting	Wall
Light emission	Direct
Fitting cover	Sandblasted glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details



Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	6W
Gross luminous flux	610
Luminaire power	8W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

Photometric details

CIE Fluxcode	67 90 98 98 41
--------------	----------------

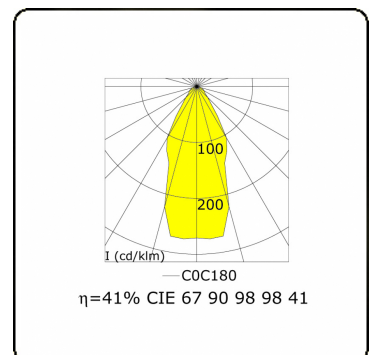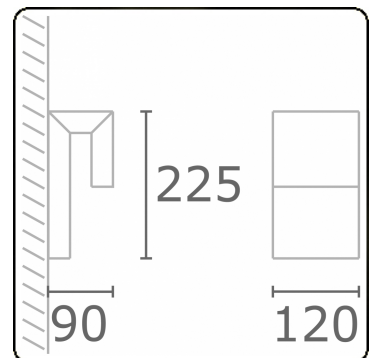

Remarks

direct or indirect light output

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
F
 Auf Anfrage.
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015