

**Connex 8**  
35.70841-9910

**Fixture details**

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 54
Housing	Aluminium
Finish	RAL 9016 traffic white textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 4000K
Wattage	59W
Gross luminous flux	6000
Luminaire power	65W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

**Photometric details**

CIE Fluxcode	99 100 100 100 90
--------------	-------------------

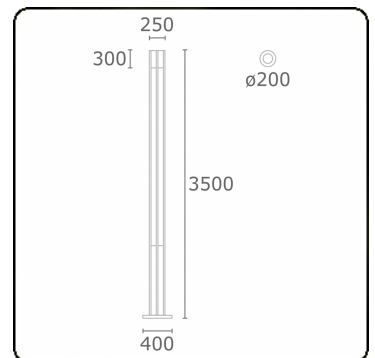

**Remarks**

including connection door with fuse

**ENERGY**

A  
 Verkrijgbaar op aanvraag.

B  
 Disponible sur demande.

C  
 Available on request.

D  
 Available on request.

E  
 Available on request.

F  
 Auf Anfrage.

G

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015