

**Gardo-1**  
35.01194-9905

**Fixture details**

|                 |                                  |
|-----------------|----------------------------------|
| Mounting        | Ground                           |
| Light emission  | Direct                           |
| Fitting cover   | Glass                            |
| Protection rate | IP 54                            |
| Housing         | Aluminium                        |
| Finish          | RAL 9011 graphite black textured |
| Certificates    | CE, ISO 9001                     |

**Electric details**


|                  |                |
|------------------|----------------|
| Protection class | I              |
| Supply           | 230V           |
| Control gear box | Current driver |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 4000K        |
| Wattage             | 24W              |
| Gross luminous flux | 2560             |
| Luminaire power     | 29W              |
| Number              | 1                |
| Lifetime LED module | L80/B10 = 50000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | 85               |

**Photometric details**

|              |                |
|--------------|----------------|
| CIE Fluxcode | 53 83 97 99 73 |
|--------------|----------------|

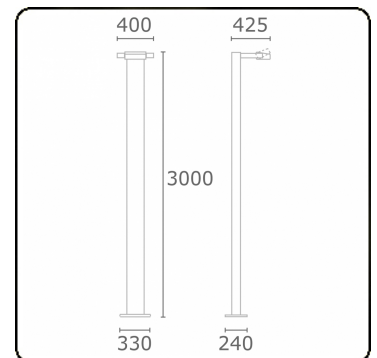

**Remarks**

including connection door with fuse - TC-D and LED with sandblasted glass, other light sources with clear glass

**ENERGY**

A ▶  
B ▶ **Verkrijgbaar op aanvraag.**  
C ▶ **Disponible sur demande.**  
D ▶  
E ▶ **Available on request.**  
F ▶  
G ▶ **Auf Anfrage.**

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015