

Gardo-2
35.01294-9906

Fixture details

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 54
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	24W
Gross luminous flux	5120
Luminaire power	2x29W
Number	2
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

Photometric details

CIE Fluxcode	53 83 97 99 73
--------------	----------------

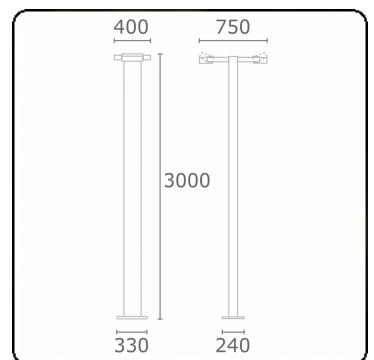

Remarks

including connection door with fuse - TC-D and LED with sandblasted glass, other light sources with clear glass

ENERGY

A ▶
B ▶ **Verkrijgbaar op aanvraag.**
C ▶ **Disponible sur demande.**
D ▶
E ▶ **Available on request.**
F ▶
G ▶ **Auf Anfrage.**

WXYZ
kWh/1000h

MULTILINE® 2019/2015