

Nio 1
35.44150003-9906

Fixture details

Mounting	Ground
Light emission	Direct-Indirect
Fitting cover	satin diffusor - ribbed black
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Power supply 24V DC

Lamp details

Lamptype	LED 3000K
Wattage	11,6W
Gross luminous flux	2 x 1010
Luminaire power	25,6W
Number	2
Lifetime LED module	L70/B10 > 50000h
Color tolerance	MacAdam 3
CRI	80

Photometric details

CIE Fluxcode	68 90 98 100 9
CIE Fluxcode Indirect	68 90 98 100 9

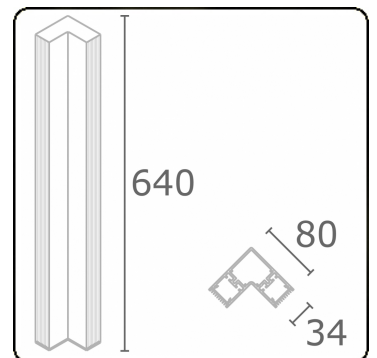

ENERGY

A
 Verkrijgbaar op aanvraag.

B
 Disponible sur demande.

C
D
 Available on request.

E
F
 Auf Anfrage.

G

WXYZ
kWh/1000h

MULTILINE® 2019/2015