

Metro-D 451x180mm - 30° ajustable - with recessed housing
36.73091-0000

Fixture details

| | |
|--------------------|---|
| Mounting | Ground - recessed |
| Light emission | Indirect - adjustable |
| Light distribution | adjustable |
| Fitting cover | Glass |
| Protection rate | IP 67 |
| Maximum load | 5000 kg drive-across (including recessing housi |
| T° | <75 ° |
| Housing | Aluminium/Stainless Steel |
| Finish | matt black finish RAL 9105 |
| Certificates | CE, ISO 9001 |



Electric details


| | |
|------------------|----------------|
| Protection class | I |
| Supply | 230V |
| Control gear box | Current driver |

Lamp details

| | |
|---------------------|------------------|
| Lamptype | LED 3000K 32° |
| Wattage | 16x1W |
| Gross luminous flux | 2016 |
| Luminaire power | 18W |
| Cover glass | flat - clear |
| Number | 1 |
| Lifetime LED module | L70/B50 > 60000h |
| Color tolerance | MacAdam 3 |
| CRI | 80 |

Photometric details

| | |
|--------------|------------|
| CIE Fluxcode | 0 0 0 0 73 |
|--------------|------------|

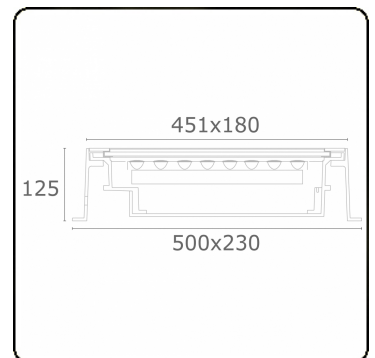

Remarks

451x180mm - clear glass - strips are individually adjustable up to 30°

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015