

Metro-S Ø120mm - COB - without recessed housing
36.010192-0000

Fixture details

| | |
|--------------------|---|
| Mounting | Ground - recessed |
| Light emission | Indirect |
| Light distribution | Symmetrical |
| Fitting cover | Glass |
| Protection rate | IP 67 |
| Maximum load | 1000 kg drive-across (excluding recessing housi |
| T° | <75° ° |
| Housing | Aluminium/Stainless Steel |
| Finish | matt black finish RAL 9105 |
| Certificates | CE, ISO 9001 |




Electric details

| | |
|------------------|----------------|
| Protection class | I |
| Supply | 230V |
| Control gear box | Current driver |

Lamp details

| | |
|---------------------|-------------------|
| Lamptype | LED 2700K 10° |
| Wattage | 9W |
| Gross luminous flux | 940 |
| Luminaire power | 10W |
| Cover glass | flat - clear |
| Number | 1 |
| Lifetime LED module | L80/B10 = 100000h |
| Color tolerance | MacAdam 3 |
| CRI | 80 |

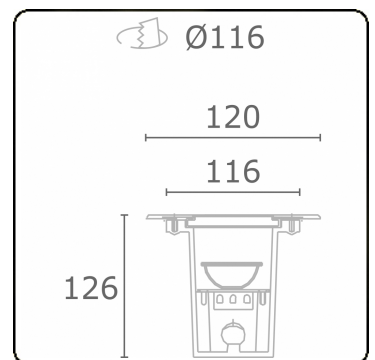

Remarks

Ø120mm - clear glass

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015