

Nhua - satin - HO 150mA - RAL  
05.19000593-9999

#### Fixture details

|                 |                           |
|-----------------|---------------------------|
| Mounting        | Ceiling                   |
| Light emission  | Direct-Indirect           |
| Fitting cover   | satin diffusor            |
| Protection rate | IP 40                     |
| Housing         | Aluminium                 |
| Finish          | RAL colour at your choice |
| Certificates    | CE, ISO 9001              |

#### Electric details

|                  |                |
|------------------|----------------|
| Protection class | I              |
| Supply           | 230V           |
| Control gear box | Current driver |

#### Lamp details

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K        |
| Wattage             | 3,2W             |
| Gross luminous flux | 5715             |
| Luminaire power     | 31,6W            |
| Number              | 9                |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | >80              |

#### Photometric details



|              |                |
|--------------|----------------|
| UGR          | >19            |
| CIE Fluxcode | 34 61 83 76 75 |

#### Dimensions

|   |         |
|---|---------|
| A | 2534 mm |
|---|---------|

#### Remarks

Ceiling luminaire - HO 150mA - satin - RAL

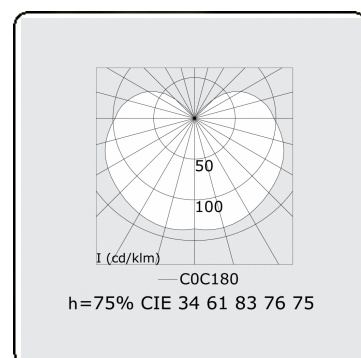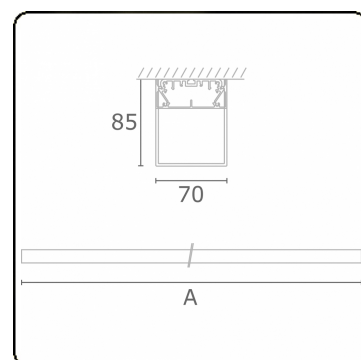

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**MULTILINE®**

**A**

**B**

**C**

**D**

**E**

**F**

**G**

**WXYZ**

kWh/1000h

2019/2015