

Nhua - satin - HO 150mA - RAL
05.19004553-9999

Fixture details

Mounting	Ceiling
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 40
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 3000K
Wattage	3,2W
Gross luminous flux	3175
Luminaire power	17,6W
Number	5
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	34 61 83 76 75

Dimensions

A	1414 mm
---	---------

Remarks

Ceiling luminaire - HO 150mA - satin - RAL

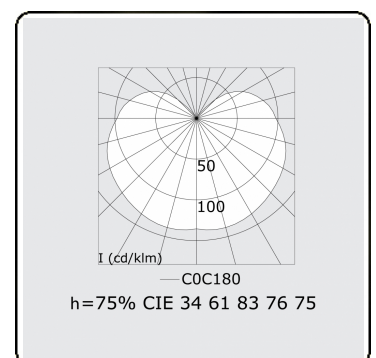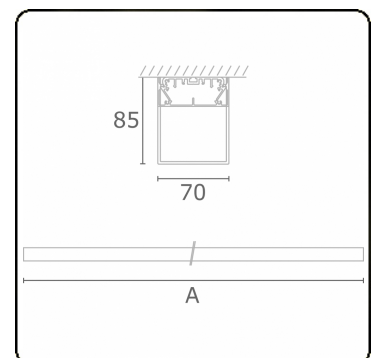

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

A

B

C

D

E

F

G



WXYZ

kWh/1000h

2019/2015