

Rekta 80x100 Direct - MPO - HO 150mA - ANO  
07.68014593-0001

**Fixture details**

|                 |                          |
|-----------------|--------------------------|
| Mounting        | Ceiling recessed         |
| Light emission  | Direct                   |
| Fitting cover   | micro prismatic diffuser |
| Protection rate | IP 20                    |
| Housing         | Aluminium                |
| Finish          | anodized finish          |
| Certificates    | CE, ISO 9001             |



**Electric details**

|                  |                        |
|------------------|------------------------|
| Protection class | I                      |
| Supply           | 230V                   |
| Control gear box | Current driver DALI/TD |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K        |
| Wattage             | 3,2W             |
| Gross luminous flux | 5715             |
| Luminaire power     | 31,6W            |
| Number              | 9                |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | >80              |

**Photometric details**



|              |                 |
|--------------|-----------------|
| UGR          | <19             |
| CIE Fluxcode | 61 91 99 100 60 |

**Dimensions**

|   |         |
|---|---------|
| A | 2524 mm |
|---|---------|

**Remarks**

Recessed luminaire (trimless) - Direct - HO 150mA - MPO - ANO

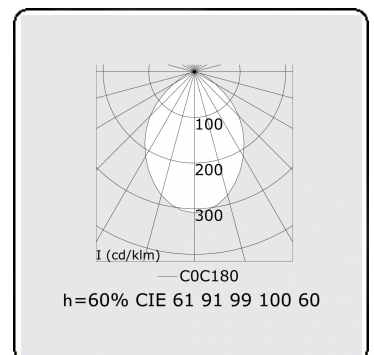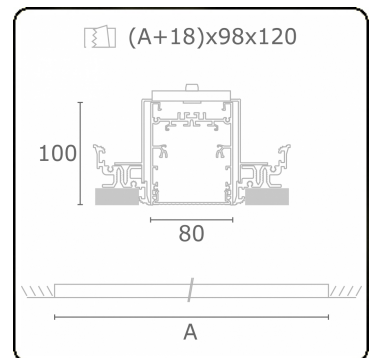

**ENERGY** 

A  
 Verkrijgbaar op aanvraag.  
B  
 Disponible sur demande.  
C  
D  
 Available on request.  
E  
F  
 Auf Anfrage.  
G

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015