

Rekta 65x65 Direct - MPO - HO 325mA - ANO
05.94010693-0001

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	7,1W
Gross luminous flux	12105
Luminaire power	70,7W
Number	9
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	58 88 98 100 62

Dimensions

A	2530 mm
---	---------

Remarks

Ceiling luminaire - Direct - HO 325mA - MPO - ANO

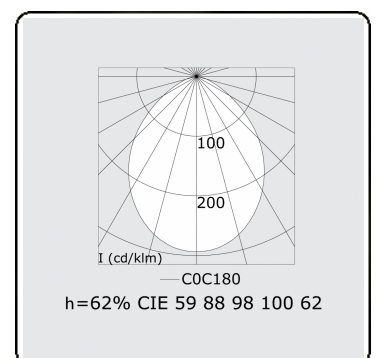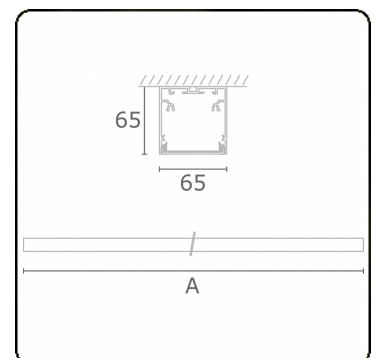




A

B

C

D

E

F

G

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015