

Rekta 65x65 Direct - satin - HO 325mA - ANO  
05.94004603-0001

**Fixture details**

|                 |                 |
|-----------------|-----------------|
| Mounting        | Ceiling         |
| Light emission  | Direct          |
| Fitting cover   | satin diffusor  |
| Protection rate | IP 20           |
| Housing         | Aluminium       |
| Finish          | anodized finish |
| Certificates    | CE, ISO 9001    |



**Electric details**

|                  |                        |
|------------------|------------------------|
| Protection class | I                      |
| Supply           | 230V                   |
| Control gear box | Current driver DALI/TD |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K        |
| Wattage             | 7,1W             |
| Gross luminous flux | 13450            |
| Luminaire power     | 78,6W            |
| Number              | 10               |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | >80              |

**Photometric details**



|              |                 |
|--------------|-----------------|
| UGR          | >19             |
| CIE Fluxcode | 49 80 96 100 70 |

**Dimensions**

|   |         |
|---|---------|
| A | 2810 mm |
|---|---------|

**Remarks**

Ceiling luminaire - Direct - HO 325mA - satin - ANO

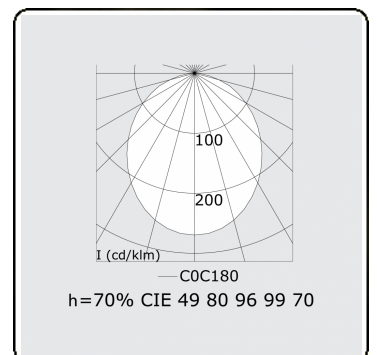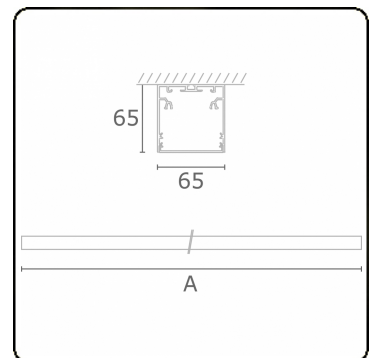

**ENERGY**

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015