

Tube 90 - Surfaced - HO 325mA - transit wired - RAL
35.39135653-9999

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium/Polycarbonate
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



Electric details


Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour DALI

Lamp details

Lamptype	LED 3000K
Wattage	7,2W
Gross luminous flux	6400
Luminaire power	39,6W
Number	5
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details

CIE Fluxcode	48 78 94 100 61
--------------	-----------------

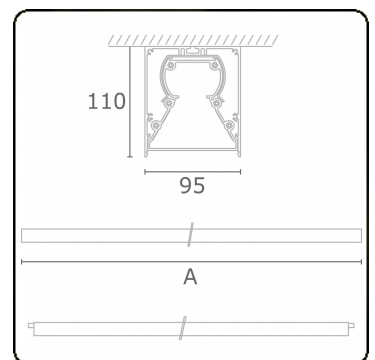

Dimensions

A	1864 mm
---	---------

Remarks

Ceiling luminaire - Surface-mounted - HO 325mA - transit wiring - RAL

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015