

Sferio Direct/Indirect - MPO - MO - RAL 9006
05.36116163-9006


Fixture details

Mounting	Ceiling
Light emission	Direct-Indirect
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9006 White aluminium
Certificates	CE, ISO 9001



Electric details

Protection class	I
Supply	230V
Control gear box	Power supply touch-dim

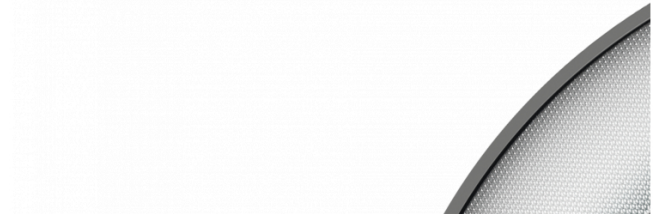

Lamp details

Lamptype	LED 3000K
Wattage	266W
Luminaire power	266W
Luminaire luminous flux	26573
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	60 87 97 56 100

Dimensions

A	1200 mm
---	---------

Remarks

Ceiling luminaire - Direct/Indirect - MPO - MO - RAL 9006

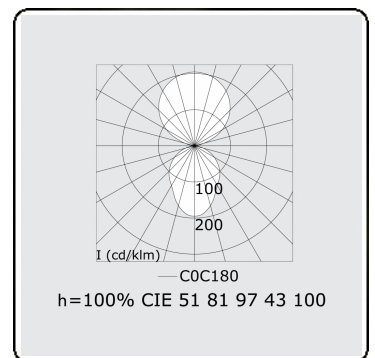

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
 Auf Anfrage.
F
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015