

Sferio Direct - MPO - MO - RAL 9003
07.36210134-9003

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9003 Signal white
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	35W
Luminaire power	35W
Luminaire luminous flux	5150
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	60 87 97 100 100

Dimensions

A	520 mm
---	--------

Remarks

Recessed luminaire (with trim) - Direct - MPO - MO - RAL 9003

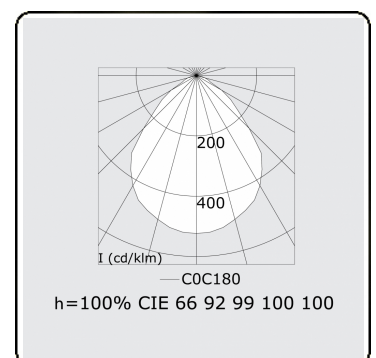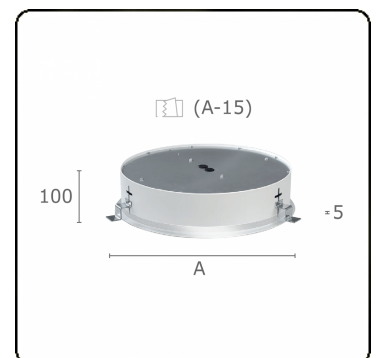

A

B

C

D

E

F

G

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015