

Annoo 1.1
35.16005-9906

Fixture details

| | |
|-----------------|-----------------------------------|
| Mounting | Wall |
| Light emission | Diffus |
| Fitting cover | satin diffusor |
| Protection rate | IP 65 |
| Housing | Aluminium |
| Finish | RAL 9006 white aluminium textured |
| Certificates | CE, ISO 9001 |



Electric details


| | |
|------------------|------|
| Protection class | I |
| Supply | 230V |

Lamp details

| | |
|-------------------------|------------------|
| Lamptype | LED 3000K |
| Wattage | 10W |
| Luminaire power | 10W |
| Luminaire luminous flux | 460 |
| Number | 1 |
| Lifetime LED module | L80/B10 = 50000h |
| Color tolerance | MacAdam 3 |
| CRI | 80 |

Photometric details

| | |
|--------------|-----------------|
| CIE Fluxcode | 12 35 66 50 100 |
|--------------|-----------------|

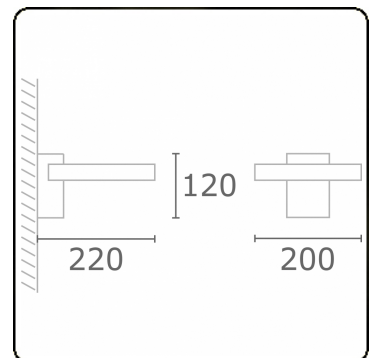

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

MULTILINE®

35.16005-9906

874/2012