

Annoo 1.1
35.16005-9910

Fixture details

Mounting	Wall
Light emission	Diffus
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9016 traffic white textured
Certificates	CE, ISO 9001



Electric details


Protection class	I
Supply	230V

Lamp details

Lamptype	LED 3000K
Wattage	10W
Luminaire power	10W
Luminaire luminous flux	460
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	80

Photometric details

CIE Fluxcode	12 35 66 50 100
--------------	-----------------

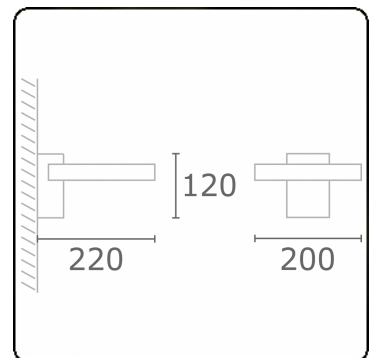

ENERGY

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE® 2019/2015