

**Arcoo**  
35.15000-9906

**Fixture details**

Mounting	Ground
Light emission	Diffus
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

**Electric details**



Protection class	I
Supply	230V
Control gear box	Power supply 24V DC

**Lamp details**

Lamptype	LED 3000K
Wattage	4,3W
Gross luminous flux	320
Luminaire power	6W
Number	1
Lifetime LED module	L70/B10 > 50000h
Color tolerance	MacAdam 4
CRI	80

**Photometric details**

CIE Fluxcode	42 72 90 94 58
--------------	----------------

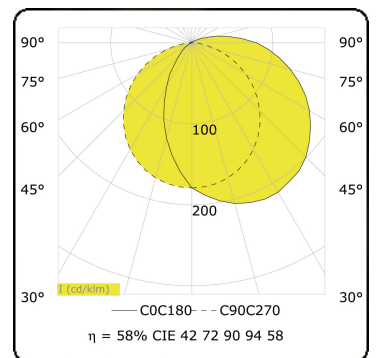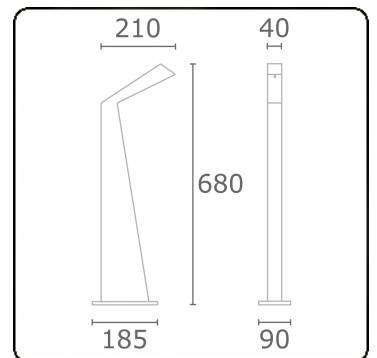

This luminaire contains built-in LED lamps.

**LED**

The lamps cannot be changed in the luminaire.

**MULTILINE®**

35.15000-9906

874/2012