

**Arcoo**  
35.15005-9906

**Fixture details**

|                 |                                   |
|-----------------|-----------------------------------|
| Mounting        | Wall                              |
| Light emission  | Diffus                            |
| Fitting cover   | satin diffusor                    |
| Protection rate | IP 65                             |
| Housing         | Aluminium                         |
| Finish          | RAL 9006 white aluminium textured |
| Certificates    | CE, ISO 9001                      |

**Electric details**


|                  |                     |
|------------------|---------------------|
| Protection class | I                   |
| Supply           | 230V                |
| Control gear box | Power supply 24V DC |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K        |
| Wattage             | 4,3W             |
| Gross luminous flux | 320              |
| Luminaire power     | 6W               |
| Number              | 1                |
| Lifetime LED module | L70/B10 > 50000h |
| Color tolerance     | MacAdam 4        |
| CRI                 | 80               |


**Photometric details**

|              |                |
|--------------|----------------|
| CIE Fluxcode | 42 72 90 94 58 |
|--------------|----------------|

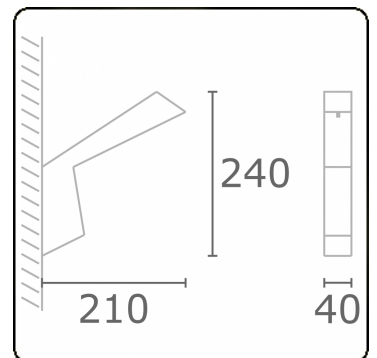


**Remarks**


Wall



This luminaire contains built-in LED lamps.

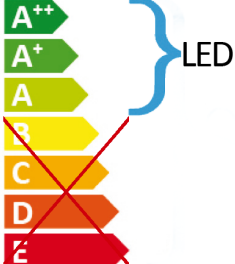

LED



The lamps cannot be changed in the luminaire.

**MULTILINE®**

35.15005-9906

874/2012