

Connex 7  
35.70713-9910

**Fixture details**

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9016 traffic white textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K
Wattage	39,2W
Gross luminous flux	7330
Luminaire power	43W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**

CIE Fluxcode	15 40 69 57 71
--------------	----------------

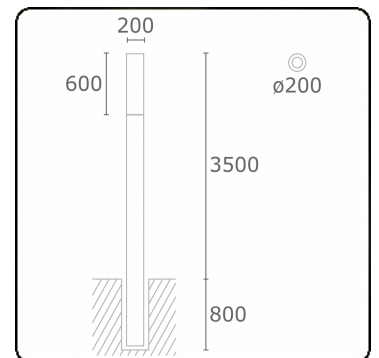

**Remarks**

including connection door with fuse

**ENERGY**

A  
 Verkrijgbaar op aanvraag.

B  
 Disponible sur demande.

C  
 Available on request.

D  
 Available on request.

E  
 Available on request.

F  
 Auf Anfrage.

G

**WXYZ**  
kWh/1000h

**MULTILINE**<sup>®</sup> 2019/2015