

**Gardo-2**  
35.01293-9906

**Fixture details**

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 54
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K
Wattage	24W
Gross luminous flux	4880
Luminaire power	2x29W
Number	2
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

**Photometric details**

CIE Fluxcode	53 83 97 99 73
--------------	----------------

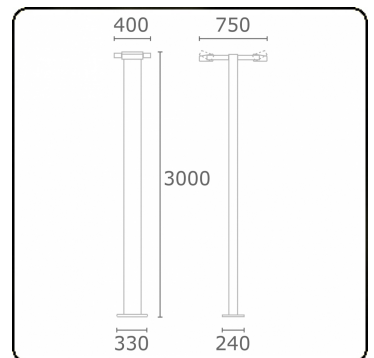

**Remarks**

including connection door with fuse - TC-D and LED with sandblasted glass, other light sources with clear glass

**ENERGY**

A ▶  
B ▶ **Verkrijgbaar op aanvraag.**  
C ▶ **Disponible sur demande.**  
D ▶  
E ▶ **Available on request.**  
F ▶  
G ▶ **Auf Anfrage.**

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015