

**Linea**  
35.60739-9910

**Fixture details**

Light emission	Direct-Indirect
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9016 traffic white textured
Certificates	CE, ISO 9001



**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K
Wattage	3W
Gross luminous flux	610
Luminaire power	11W
Number	2
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

**Photometric details**

CIE Fluxcode	73 94 99 50 79
--------------	----------------

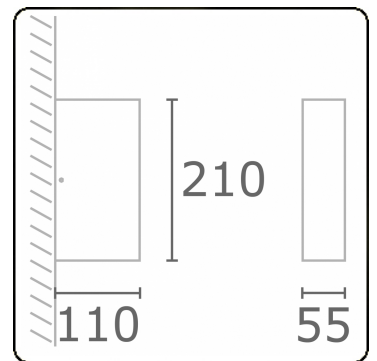

**Remarks**

direct/indirect light distribution

**ENERGY**

A  
 Verkrijgbaar op aanvraag.  
B  
 Disponible sur demande.  
C  
 Disponible sur demande.  
D  
 Available on request.  
E  
 Available on request.  
F  
 Auf Anfrage.  
G

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015