

M1-E
35.14014-9906

Fixture details

Mounting	Ground
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details



Lamptype	LED 4000K
Wattage	14,4W
Gross luminous flux	1200
Luminaire power	15,8W
Number	1
Lifetime LED module	L80/B10 = 30000h
Color tolerance	MacAdam 3
CRI	80

Photometric details

CIE Fluxcode	49 80 96 100 66
--------------	-----------------

Dimensions

A	390 mm
B	400 mm
C	330 mm

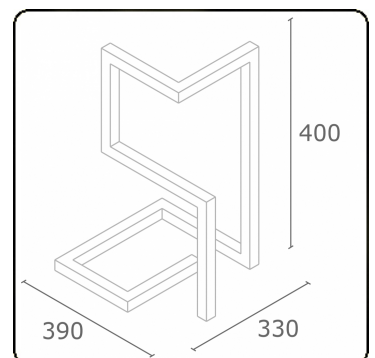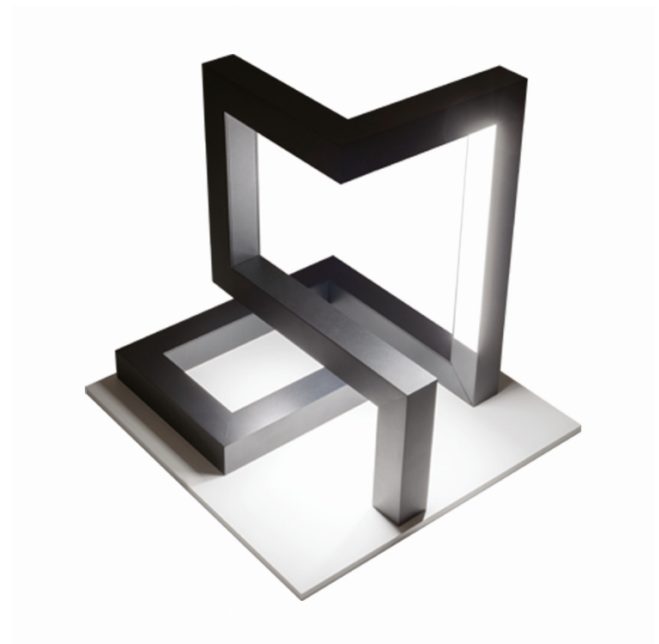

ENERGY

Verrijgbaar op aanvraag.
Disponible sur demande.
Available on request.
Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE® 2019/2015