

**Nio 1**  
35.44170003-9906

**Fixture details**

Mounting	Ground
Light emission	Direct-Indirect
Fitting cover	satin diffusor - ribbed black satin diffusor - ribbed white
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Power supply 24V DC

**Lamp details**

Lamptype	LED 3000K
Wattage	11,6W
Gross luminous flux	2 x 1010
Luminaire power	25,6W
Number	2
Lifetime LED module	L70/B10 > 50000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	68 90 98 100 9
CIE Fluxcode Indirect	50 80 96 100 48

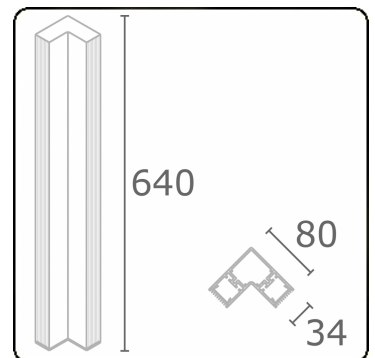

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015