

Sergeant
35.04593-9905

Fixture details

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 54
Housing	Aluminium
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	24W
Gross luminous flux	2440
Luminaire power	29W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

Photometric details

CIE Fluxcode	53 83 97 99 73
--------------	----------------

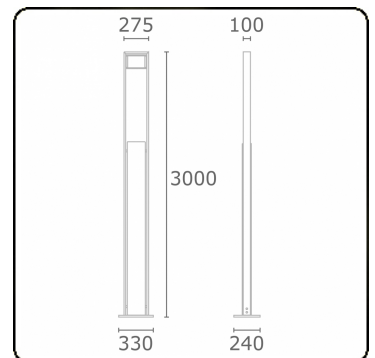

Remarks

standard colour combination: wall base silver grey, housing antracite!

ENERGY

A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

Available on request.

D

Auf Anfrage.

E

F

G

WXYZ

kWh/1000h

MULTILINE® 2019/2015