

Spy-1 - support - height 450mm  
35.11156-9906

**Fixture details**

Mounting	Ground
Light emission	Spotlight
Fitting cover	Glass
Protection rate	IP 54
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K 8°
Wattage	3x1W
Gross luminous flux	378
Luminaire power	4,2W
Number	1
Lifetime LED module	L70/B50 > 60000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	95 97 99 100 75
--------------	-----------------

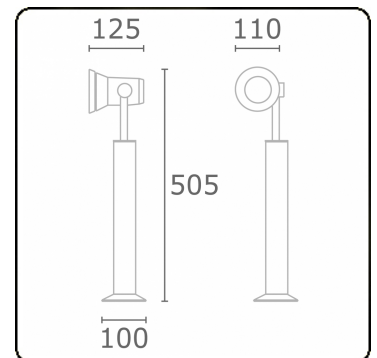

**ENERGY**

A  
 Verkrijgbaar op aanvraag.

B  
 Disponible sur demande.

C  
 Available on request.

D  
 Available on request.

E  
 Available on request.

F  
 Auf Anfrage.

G

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015