

Kubik T2
35.06204-9906

Fixture details

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details



Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	8W
Gross luminous flux	1420
Luminaire power	8,8W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details

CIE Fluxcode	13 37 67 50 51
--------------	----------------

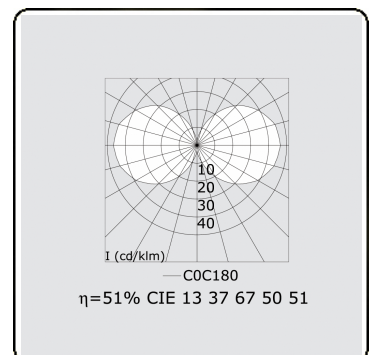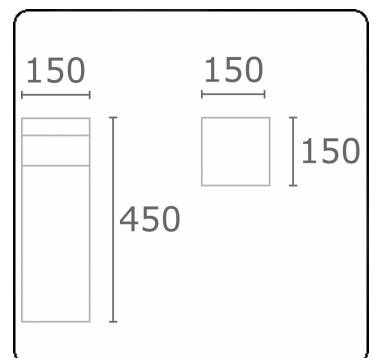

ENERGY

A →
 Verkrijgbaar op aanvraag.
B →
 Disponible sur demande.
C →
D →
 Available on request.
E →
F →
 Auf Anfrage.
G →

WXYZ
kWh/1000h

MULTILINE® 2019/2015