

Rekta 20 - LRLW - 150mA - RAL
07.42040444-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - white matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	6,0W
Gross luminous flux	4400
Luminaire power	26,4W
Number	4
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	15,8/19,4
CIE Fluxcode	96 98 99 100 85

Dimensions

A	1123 mm
---	---------

Remarks

LRLW optiek - 150mA - RAL

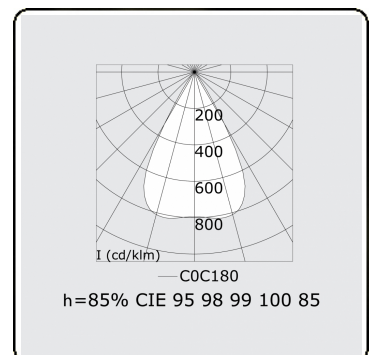

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
F
 Auf Anfrage.
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015