

Grip T1 - Direct - satiné - 100mA - RAL  
05.43004284-9999

**Fixture details**

Mounting	Ceiling
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

**Lamp details**

Lamptype	LED 4000K
Wattage	4,0W
Gross luminous flux	6040
Luminaire power	35,2W
Number	8
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**



UGR	>19
CIE Fluxcode	50 80 96 99 66

**Dimensions**

A	2250 mm
B	1930 mm

**Remarks**

Ceiling

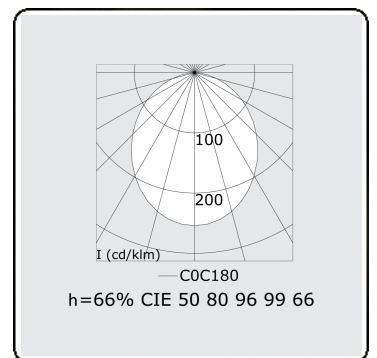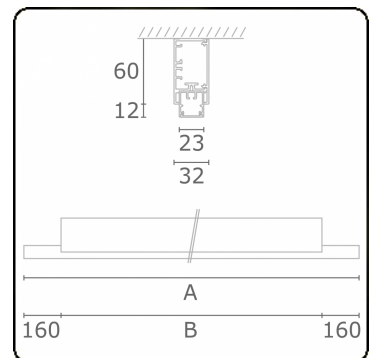

**ENERGY**

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015