

Hideline 40 Direct - LRLB - 100mA - RAL  
07.71654254-9999

**Fixture details**

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

**Lamp details**

Lamptype	LED 4000K
Wattage	4,0W
Gross luminous flux	3775
Luminaire power	22,0W
Number	5
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**


UGR	<19
CIE Fluxcode	99 99 100 99 81

**Dimensions**

A	1424 mm
---	---------

**Remarks**

Ceiling

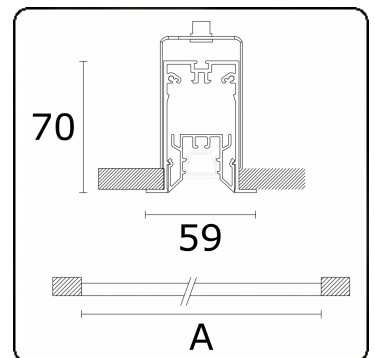

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015